




Hydraulic Electric Pump PE

- Features:**
- Reduce operating time and increase the safety factor through the use of a pump
 - Standard model including remote control, pressure gauge, 2/2 directional control valves for single-acting cylinders and 2 x 3 m hydraulic hoses with non-drip quick-release fasteners on both sides



Technical data	PE
Item number	2-10199
Working pressure (preset)	7,542psi / 520 bar
Flow rate stage 1 per lift	0.67 gal/min @ 102 psi 2,5 ltr/min @ 7 bar
Flow rate stage 2 per lift	0.08 gal/min @ 7,542 psi 0,3 ltr/min @ 520 bar
Tank capacity	1.27 gal / 4,8 l
Overall dimensions (L x W x H)	11.3 x 9.3 x 19.4" / 286 x 237 x 493 mm
Weight with oil without hoses	66 lbs. / 30 kg
Hydraulic hoses (10" / 3 m), - with quick-release fastener	2 hoses
For GKS toe jack models	2x V5, V5-EX, V10, V10-EX, V15, V15-EX, V15-EX-270, V20, V20-EX, V30-EX, G5, G10
Electric connection	120V/60 Hz

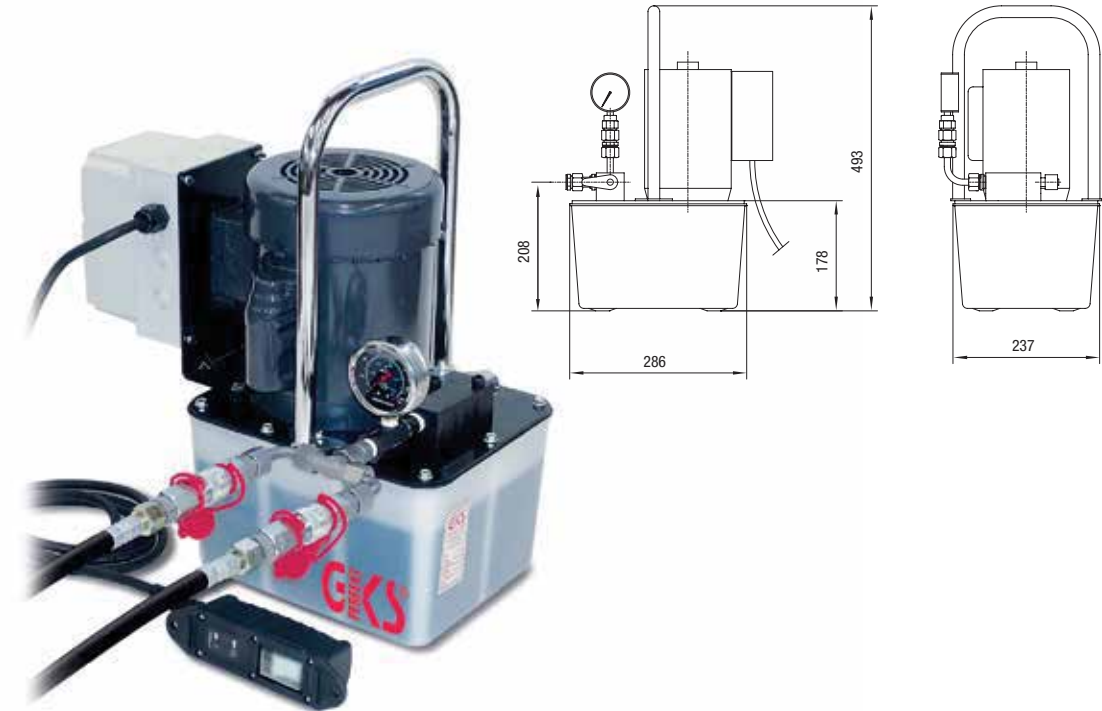

- Contents
- Hydraulic Toe Jacks
- Pumps
- Transport Dollies
- Rotating Dollies
- ROBOTS
- Rollers
- Nickel Plated Equipment