





Transport Dollies F20 / L20

Features:

- L dolly- includes towing eye for easy transport of the load
- F dolly- width adjustable points of contact
- High durability rollers that are non-marking
- All wheels are boxed in for protection

Technical data	F20	L20
Item number	3-11060	3-11061
Loading height / number of wheels (140 x 85mm)	7.1" / 8 180 mm / 8	7.1" / 8 180 mm / 8
Contact surface per cartridge	11.2x8.7" / 280 x 220 mm	—
Connecting bar	17.3 - 63" / 440 x 1600 mm	—
Swivel plate ø 170 mm, steering angle	—	±90°
Steering rod	55.9" / 1420 mm	63.8" / 1620 mm
Overall dimensions (L x W)	11 x 63" / 280 x 1600 mm	31.5 x 29.4" / 800 x 747 mm
Weight	179 lbs. / 81 kg	375 lbs. / 170 kg
Load capacity per unit	44,000 lbs. / 200 kN (20 t)	44,000 lbs. / 200 kN (20 t)
Combined load capacity	88,000 lbs. / 400 kN (40 t)	

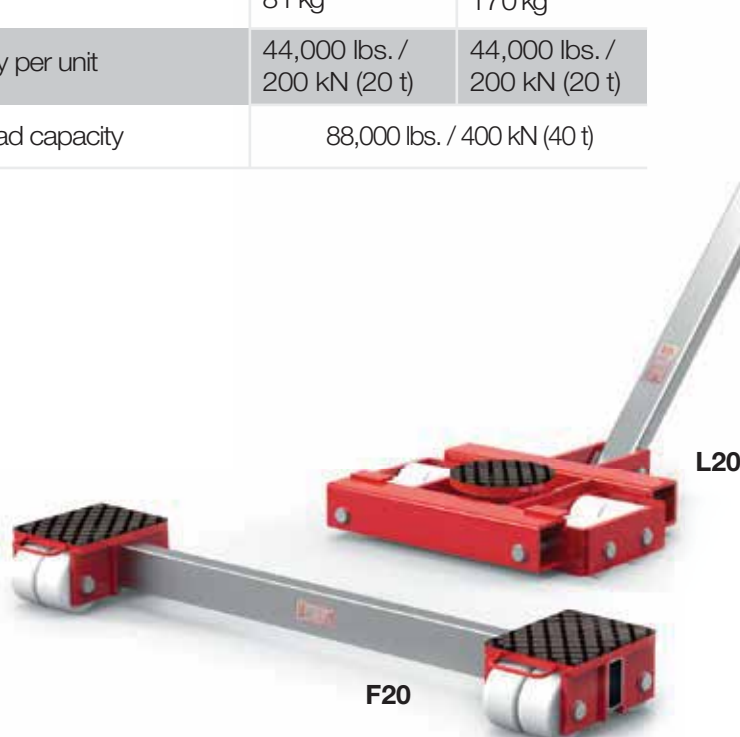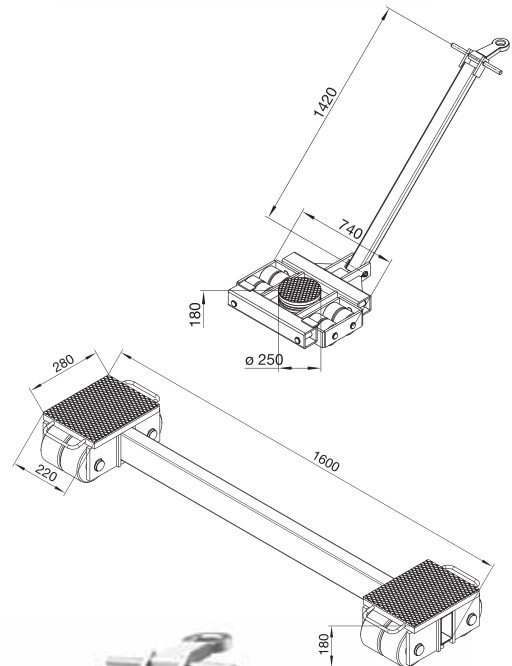

Contents

Hydraulic
Toe Jacks

Pumps

Transport Dollies

Rotating Dollies

ROBOTS

Rollers

Nickel
Plated Equipment