






Transport Dollies F40 / L40

Features:

- L dolly- includes towing eye for easy transport of the load
- F dolly- two connecting bars for greater stability
- High durability rollers that are non-marking
- All wheels are boxed in for protection

Technical data

	F40	L40
Item number	3-11770	3-11771
Loading height / number of wheels (140 x 85mm)	7.1" / 16 180 mm / 16	7.1" / 16 180 mm / 16
Contact surface per cartridge	15.3 x 17.3" / 389 x 440 mm	—
Connecting bar	29.1 - 71.1" / 740 x 1820 mm	—
Swivel plate ø 250 mm, steering angle	—	± 90°
Steering rod	55.9" / 1420 mm	63.8" / 1620 mm
Overall dimensions (L x W)	15.3 x 58.7" / 389 x 1490 mm	33.9 x 47.4" / 860 x 1203 mm
Weight	463 lbs./ 210 kg	582 lbs./ 264 kg
Load capacity per unit	88,000 lbs. / 400 kN (40 t)	88,000 lbs. / 400 kN (40 t)
Combined load capacity	176,000 lbs. / 800 kN (80 t)	

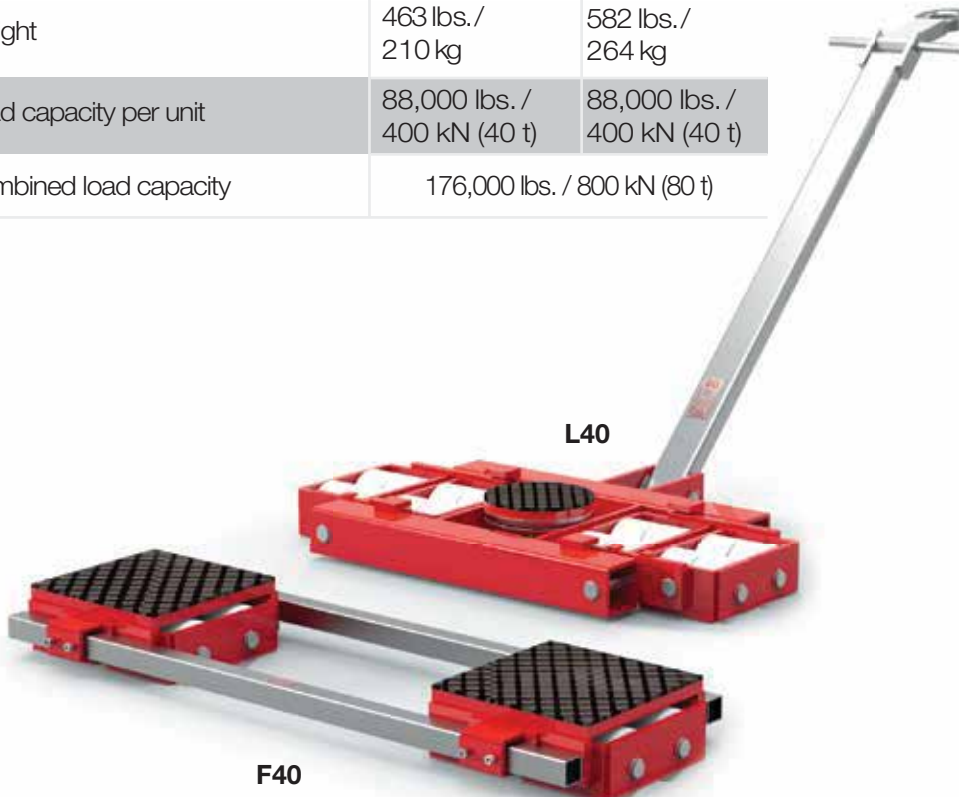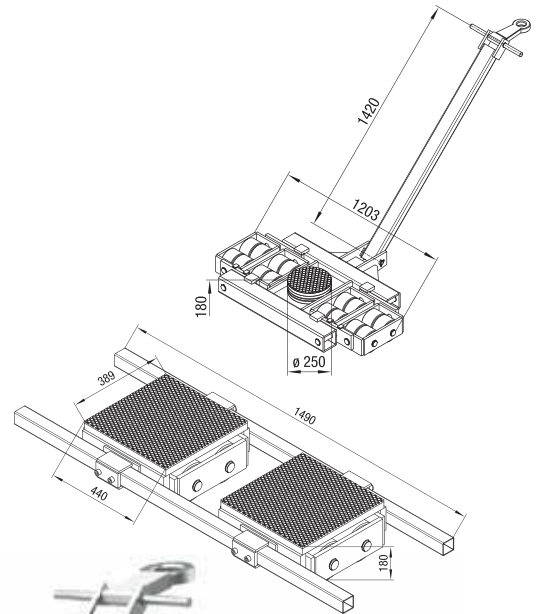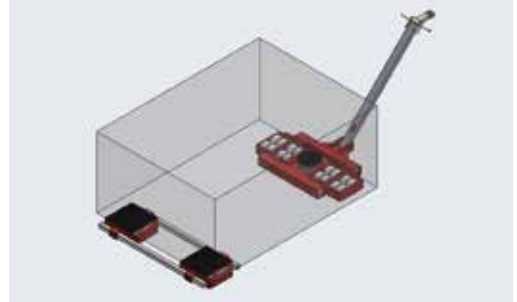

Contents

Hydraulic
Toe Jacks

Pumps

Transport Dollies

Rotating Dollies

ROBOTS

Rollers

Nickel
Plated Equipment