





Transport Dollies F60 / L60

Features:

- L dolly- swivel plate to facilitate steering
- F dolly- width adjustable points of contact
- Durable, non-marking rollers
- All wheels are boxed in for protection

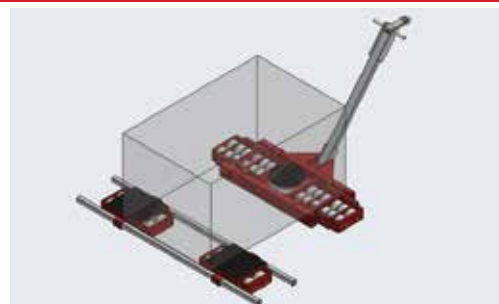

Technical data	F60	L60
Item number	3-10226	3-10227
Loading height / number of wheels (140 x 85mm)	7.1" / 24 180 mm / 24	7.1" / 24 180 mm / 24
Contact surface per cartridge	15.2 x 17.3" / 385 x 440 mm	—
Connecting bar	43.3 - 107.5" / 1100 x 2730 mm	—
Swivel plate ø 340 mm, steering angle	—	±90°
Steering rod	—	63.8"/1620 mm
Overall dimensions (L x W)	15.2 x 94.9" / 385 x 2410 mm	34.1 x 67.4" / 867 x 1713 mm
Weight	639 lbs. / 290 kg	959 lbs. / 435 kg
Load capacity per unit	132,000 lbs. / 600 kN (60 t)	132,000 lbs. / 600 kN (60 t)
Combined load capacity	264,000 lbs. / 1200 kN (120 t)	

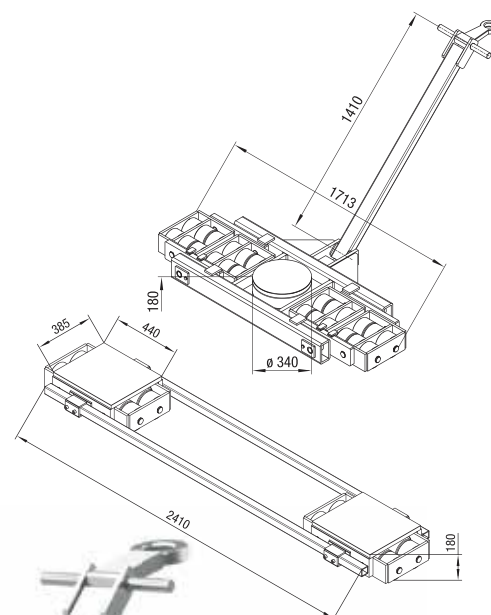

Need higher capacity?
Call us at 937-324-8867 to see how we can help!

L60

F60

